

Spectral densities of superconducting qubits with environmental resonances.

Kaushik Mitra, C. J. Lobb, and C. A. R. Sá de Melo

Joint Quantum Institute and Department of Physics
University of Maryland College Park MD 20742

(Dated: May 15, 2008)

PACS numbers: 74.50.+r, 85.25.Dq, 03.67.Lx

In this paper we derive the environmental spectral density for flux [1], phase [2] and charge [3] qubits when each of them is coupled to an environment with a resonance. From the spectral density we obtain the characteristic spontaneous emission (relaxation) lifetimes T_1 for each of these qubits, and show that there is a substantial enhancement of T_1 beyond the resonant frequency of the environment. The circuits considered are shown in Fig. 1, 2 and 3.

The flux qubit shown in Fig. 1 is measured by a dc-SQUID. Hence to study decoherence and relaxation time scales, one has to consider the noise that is transferred from the qubit to the dc-SQUID.

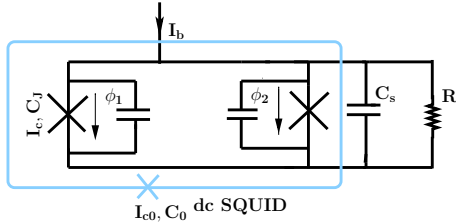


FIG. 1: Flux qubit measured by a dc-SQUID (gray line). The qubit is in the inner SQUID loop with critical current I_c and capacitance C_J for both junctions. The inner SQUID is shunted by a capacitance C_s , and environmental resistance R and is biased by a ramping current I_b . The dc-SQUID loop has junction capacitance C_0 and critical current I_{c0} .

The classical equation of motion for the dc-SQUID is

$$C_0 \ddot{\phi} + \frac{2\pi}{\Phi_0} I_{c0} \sin \phi - \frac{2\pi}{\Phi_0} I + \int_0^t dt' Y(t-t') \dot{\phi}(t') = 0 \quad (1)$$

where ϕ is the gauge invariant phase across the Josephson junction of the outer dc-SQUID loop, I_{c0} is the critical current of its junction, $\Phi_0 = h/2e$ is the flux quantum, and the total induced current in the outer dc-SQUID is

$$I = \frac{4}{L_{dc}} \langle \delta\phi_0 \sigma_z \rangle + \frac{4}{L_{dc}} \langle \phi_m \rangle + \left(\frac{2\pi}{\Phi_0} \right)^2 J_1 \langle \phi_p \rangle. \quad (2)$$

Here ϕ_p and ϕ_m are the sum and difference of the gauge invariant phases across the junctions of the inner SQUID, L_{dc} is the self-inductance of the inner SQUID, and J_1 is the bilinear coupling between ϕ_m and ϕ_p at the potential energy minimum. The term $\delta\phi_0 = \pi M_q I_{cir} / \Phi_0$, where I_{cir} is the circulating current of the localized states of the

qubit (described in terms of Pauli matrix σ_z), and M_q is the mutual inductance between the qubit and the outer dc-SQUID. The last term in Eq. (1) is the dissipation term due to effective admittance $Y(\omega)$ felt by the outer dc-SQUID.

For the charge qubit shown in Fig. 2 the classical equation of motion for the charge Q is

$$V_g(\omega) = \left(-\frac{\omega^2 L_J(\omega)}{1 - \omega^2 L_J(\omega) C_J} + \frac{1}{C_g} + i\omega Z(\omega) \right) Q(\omega) \quad (3)$$

Here, V_g is the gate voltage, C_g is the gate capacitance, L_J and C_J are the Josephson inductance and capacitance respectively, $Z(\omega)$ is the effective impedance seen by the charge qubit due to a transmission line resonator (cavity), Ω is the resonant frequency of the resonator, and Q is the charge across C_g .




FIG. 2: Circuit diagram of the Cooper-pair box. The superconducting island is connected to a large reservoir through a Josephson junction with Josephson energy E_J and capacitance C_J . The voltage bias V_g is provided through a resonator (cavity) having environmental impedance $Z(\omega)$, which is connected to C_g as shown.

For the phase qubit shown in Fig. 3 the classical equation of motion is

$$C_0 \ddot{\gamma} + \frac{2\pi}{\Phi_0} I_{c0} \sin \gamma - \frac{2\pi}{\Phi_0} I + \int_0^t dt' Y(t-t') \dot{\gamma}(t') = 0 \quad (4)$$

where I_{c0} is the critical current of Josephson junction J in Fig.1, I is the bias current, and $\Phi_0 = h/2e$ is the flux quantum. The last term is the dissipation term due to $Y(\omega)$ which is the effective admittance as seen by the dc-SQUID.

The equations of motion described in Eqs. (1), (3), and (4), can be all approximately described by the effective spin-boson Hamiltonian

$$\tilde{H} = \frac{\hbar\omega_{01}}{2} \sigma_z + \sum_k \hbar\omega_k b_k^\dagger b_k + H_{SB}, \quad (5)$$

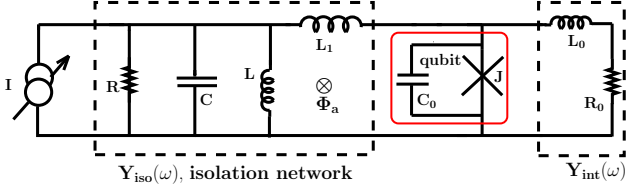


FIG. 3: Schematic drawing of the phase qubit with an RLC isolation circuit.

written in terms of Pauli matrices σ_i (with $i = x, y, z$) and boson operators b_k and $b_k^\dagger$. The first term in Eq. (5) represents a two-level approximation for the qubit (system) described by states $|0\rangle$ and $|1\rangle$ with energy difference $\hbar\omega_{01}$. The second term corresponds to the isolation network (bath) represented by a bath of bosons, where b_k and $b_k^\dagger$ are the annihilation and creation operator of the k -th bath mode with frequency ω_k . The third term is the system-bath (SB) Hamiltonian which corresponds to the coupling between the environment and the qubit.

At the charge degeneracy point for the charge qubit (gate charge $N_g = 0$), at the flux degeneracy point (external flux $\Phi_{\text{ext}} = \pi\Phi_0$) for the flux qubit, and the suitable flux bias condition for the phase qubit (external flux $\Phi_a = L_1\phi_0$) H_{SB} reduces to,

$$H_{SB} = \frac{1}{2}\sigma_x\hbar\langle 1|v|0\rangle \sum_k \lambda_{k1} (b_k^\dagger + b_k) \quad (6)$$

where $v = \phi$ for the flux qubit, Q for the charge qubit, and γ for the phase qubit. The spectral density of the bath modes $J(\omega) = \hbar \sum_k \lambda_k^2 \delta(\omega - \omega_k)$ has dimensions of energy and can be written as $J(\omega) = \omega \text{Re}Y(\omega)(\Phi_0/2\pi)^2$ for flux and phase qubits and $J(\omega) = 2\hbar\omega e^2/\hbar \text{Re}Z(\omega)$ for charge qubits.

For the flux qubit circuit shown in Fig. 1, the shunt capacitance C_s is used to control the environment, while the Ohmic resistance of the circuit is modelled by R . In this case, the environmental spectral density is

$$J_1(\omega) = \frac{\alpha_1\omega}{(1 - \omega^2/\Omega_1^2)^2 + 4\omega^2\Gamma_1^2/\Omega_1^4}. \quad (7)$$

when $\omega_m \gg \max(\omega_p, \omega_0)$, and when the dc-SQUID is far away from the switching point to be modelled by an ideal inductance L_J . Here, $\Omega_1 = 1/\sqrt{L_J C_s} = \sqrt{4\pi I_c/(C_s \Phi_0)}$ is the plasma frequency of the inner SQUID and plays the role of the resonant frequency, where I_c is the critical current for each of two Josephson junctions. Also, $\Gamma_1 = 1/(C_s R)$ plays the role of the resonance width, and $\alpha_1 = 2(eI_p I_b M_q)^2/(C_s^2 \hbar^2 R \Omega_1^4)$ reflects the low frequency behavior. The coupling between the flux qubit and the outer dc-SQUID occurs emerges from the interaction of the persistent current I_p of the qubit and the bias current I_b of the dc-SQUID via their mutual inductance M_q .

The spectral density for the charge qubit shown in Fig. 2 is obtained by solving for the normal modes of the resonator and transmission lines, including an input impedance R at each end of the resonator. It is given by

$$J_2(\omega) = \frac{e^2\Omega_2}{\ell c} \frac{\Gamma_2}{(\omega - \Omega_2)^2 + (\Gamma_2/2)^2} \quad (8)$$

where Ω_2 is the resonator frequency, ℓ is resonator length, c is the capacitance per unit length of the transmission line, C_g is the gate capacitance, and C_J is the junction capacitance. The quantity $\Gamma_2 = \Omega_2/Q$ where Q is the quality factor of the cavity.

For negligible $Y_{\text{int}}(\omega)$, the spectral density of the phase qubit shown in Fig. (3) is

$$J_3(\omega) = \left(\frac{\Phi_0}{2\pi}\right)^2 \frac{\alpha_3\omega}{(1 - \omega^2/\Omega_3^2)^2 + 4\omega^2\Gamma_3^2/\Omega_3^4}, \quad (9)$$

where $\alpha_3 = L^2/((L + L_1)^2 R) \approx (L/L_1)^2/R$ is the leading order term in the low frequency ohmic regime, $\Omega_3 = \sqrt{(L + L_1)/(LL_1 C)} \approx 1/\sqrt{LC}$ is essentially the resonance frequency, and $\Gamma_3 = 1/(2CR)$ plays the role of resonance width. Here, we used $L_1 \gg L$ corresponding to the relevant experimental regime.

Once the spectral functions of the environments are known, the relaxation rates are derived following standard methods [4]. At finite temperatures, the relaxation time

$$\frac{\hbar}{T_{1,i}} = \beta_i J_i(\omega) \coth \frac{\hbar\omega}{2k_B T} \quad (10)$$

is directly related to the environmental spectral density. Here, the index $i = 1, 2, 3$ labels the results for flux, charge and phase qubits, respectively. The parameter β_i takes values $\beta_1 = 1$ for the flux qubit of Fig. 1, $\beta_2 = C_g^2/(C_g + C_J)^2$ for the charge qubit of Fig. 2 and $\beta_3 = 1/[(\Phi_0/2\pi)^2 C_0 \omega_{01}]$ for the phase qubit of Fig. 3. An inspection of Eq. (10) and the corresponding spectral functions $J_i(\omega)$ shows that suitably detuning the qubit to higher frequencies beyond the environmental resonance can enhance the characteristic spontaneous emission lifetime (relaxation time) $T_{1,i}$ of the qubit by a couple of orders of magnitude as discussed in Ref. [5].

-
- [1] J. E. Mooij *et al*, Science **285**, 1036 (1999)
 - [2] J. Martinis *et al.*, Phys. Rev. Lett. **89**, 117901 (2002)
 - [3] A. Wallraff *et al*, Nature **431** 162 (2004)
 - [4] U. Weiss, *Quantum Dissipative Systems*, World Scientific (1999).
 - [5] K. Mitra, C. J. Lobb, and C. A. R. Sá de Melo, e-print arXiv:0712.1064 (2007).